



TRADITIONAL

3-TAB DESIGN SHINGLES >>>



>>> BRAMPTON / HAWKESBURY - US

Product featured is *Traditional Dual Black*.



>>>

www.iko.com

TRADITIONAL

3-Tab Design Shingles

Time-tested and true. So popular is this design, it's available in our widest variety of colors, a range of weights, and several limited warranty lengths. All Traditional Shingles conform to industry standards for wind and fire resistance. They are an excellent choice for exceptional roofing value.

Fiberglass Asphalt Shingles¹

These fiberglass based shingles are made with superior modified sealant for greater wind resistance, and tear strength values that exceed ASTM D3462 standards.

Marathon Ultra AR

- Marathon Ultra AR shingles feature an algae resistant granule
- Limited wind warranty coverage up to 60 mph[†]
- Limited 30-year Warranty[†]
- 5 year IKO Iron Clad protection[†]
- Class "A" Fire Resistance Rating^{††}

Marathon 25

- Limited wind warranty coverage up to 60 mph[†]
- Limited 25-year Warranty[†]
- 5 year IKO Iron Clad protection[†]
- Class "A" Fire Resistance Rating^{††}

[†]See Limited Warranty for details.

^{††}Use of an approved underlayment beneath all fiberglass shingles is strongly recommended, especially on roof slopes below 6:12. Class "A" Fire Resistance Rating is achieved only with the installation of an approved underlayment.




NOTE: Marathon Ultra AR shingles feature an algae resistant system with a limited algae resistance warranty[†].

Class "A" Fire Resistance Rating

IKO Marathon Ultra AR and Marathon 25 shingles feature a Class "A" Fire Resistance Rating. Class "A" simulates the conditions characteristic of severe external fire hazards. As part of a complete shingle roof system (deck, underlayment and the shingles themselves) IKO Marathon Ultra AR and Marathon 25 shingles meet the stringent tests of **ASTM E108** and **CAN/ULC S107**.

Specifications	Standards
Length 39-3/8" (1000 mm)	ASTM D3462 ASTM D3018
Width 13-1/4" (336 mm)	ASTM D3161 ASTM E108 Class "A" Fire Resistance Rating
Exposure 5-5/8" (143 mm)	CSA A123.5 CSA A123.51 CSA A123.52
Coverage per Bundle 32.3 sq. ft. (3 m ²)	
<small>Note: All values shown are approximate.</small>	<small>Note: Product is designed and tested to comply with ASTM/CSA Standards at time of manufacture prior to packaging.</small>

Product featured is *Traditional Dual Brown*.

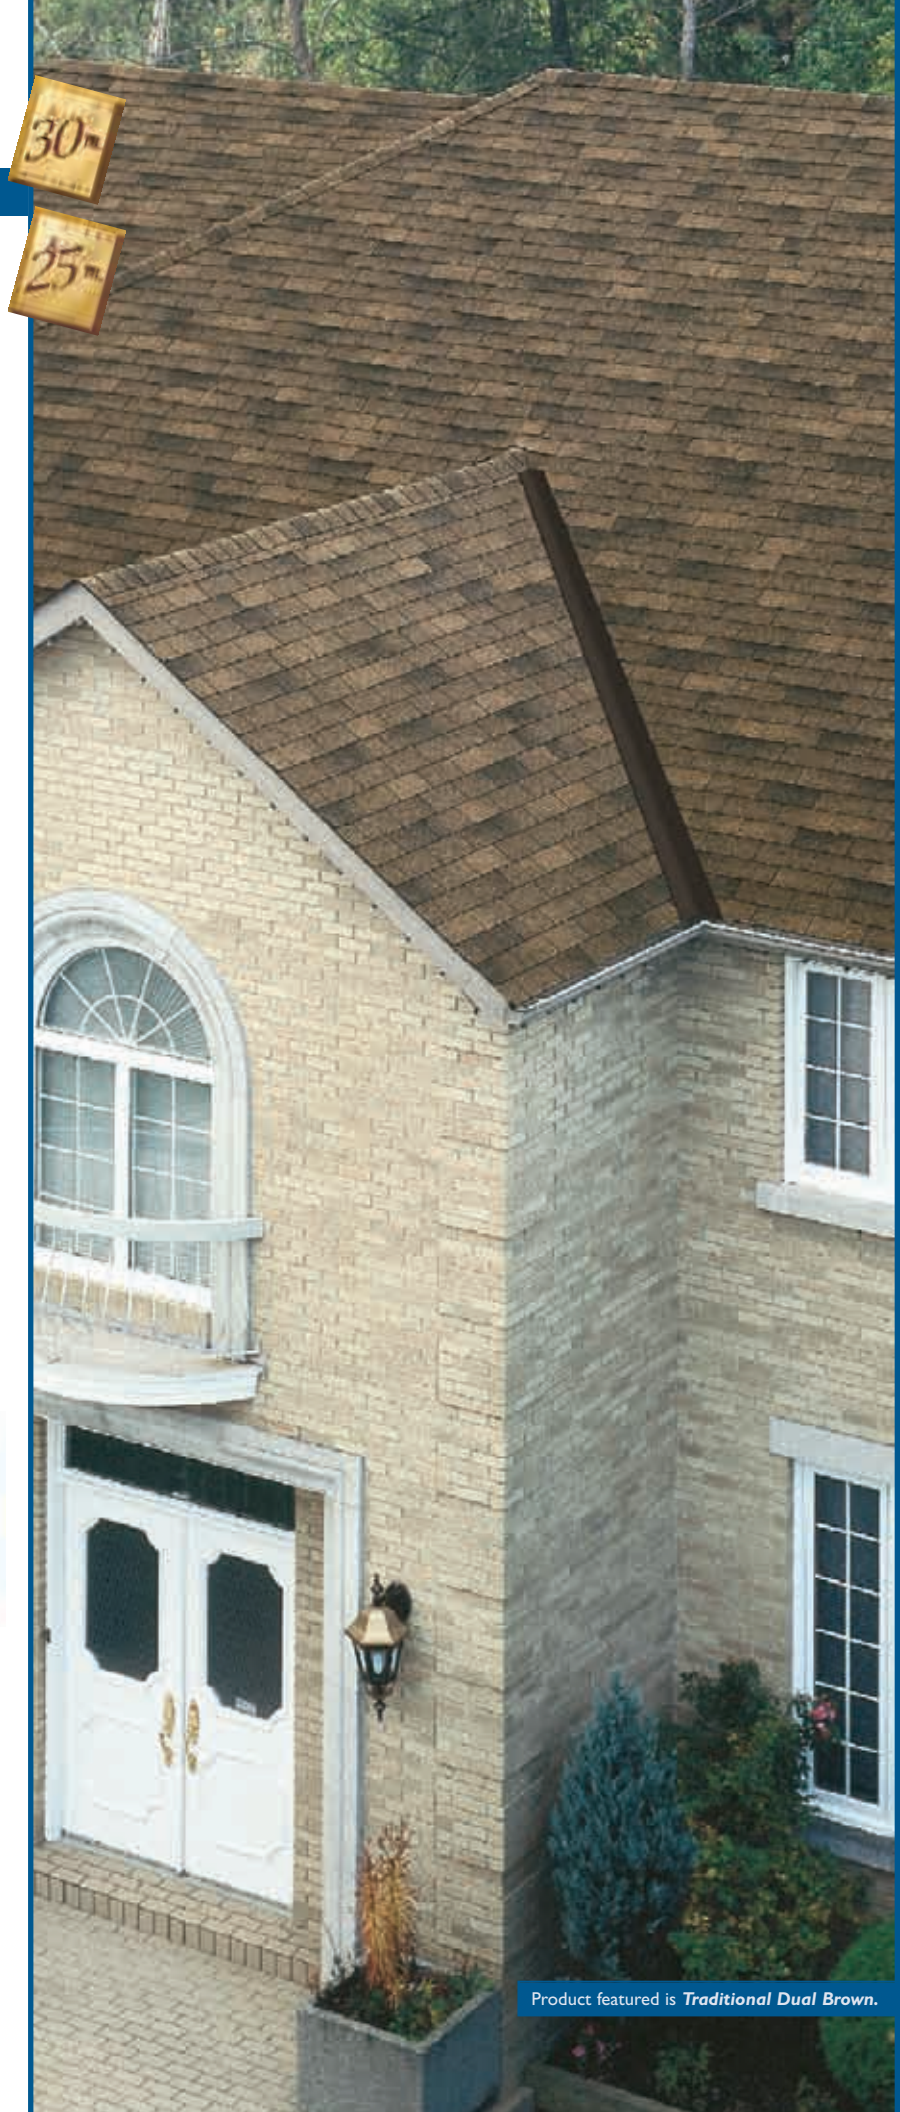

Color Availability



Dual Black



Dual Brown



Earthtone Cedar



Dual Grey



Forest Green




Harvard Slate



Weatherwood



Aged Redwood

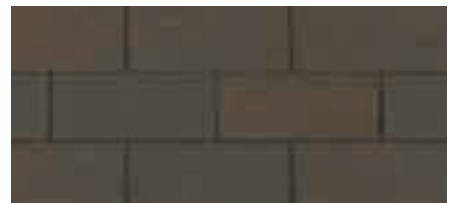

Heatherwood



Charcoal Grey



Driftwood



White



Riviera Red



National Blue*



Chapel Slate

Color Availability	Dual Black	Charcoal Grey	Harvard Slate	Dual Grey	Dual Brown	Weatherwood	Driftwood	Heatherwood	Aged Redwood	Earthtone Cedar	Forest Green	Riviera Red	National Blue*	Chapel Slate**	White
Marathon Ultra AR [®]	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Marathon 25 [®]	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

*Blue granules may fade after extensive exposure to the sun's ultraviolet rays.

**Available from Hawkesbury plant only.

Note: Shingle swatches shown are as accurate as modern printing processes allow. Shingle chips shown do not fully represent the entire color blend range of the shingles. To ensure complete satisfaction, please make your final color selection from several full size shingles and view a sample of the product installed on a home.




GoldShield • ArmourGard

Premium Ice & Water Protector Ice & Water Protector

“Invisible” protection against roof leaks.

- > Helps prevent water leakage due to ice dams and wind-driven rain
- > Improved flexibility for superior performance
- > Slip-resistant surface for safe application
- > Tear-resistant membrane
- > Self-adhesive for watertight sealing
- > Self-sealing around roofing nails
- > Meets most building code requirements

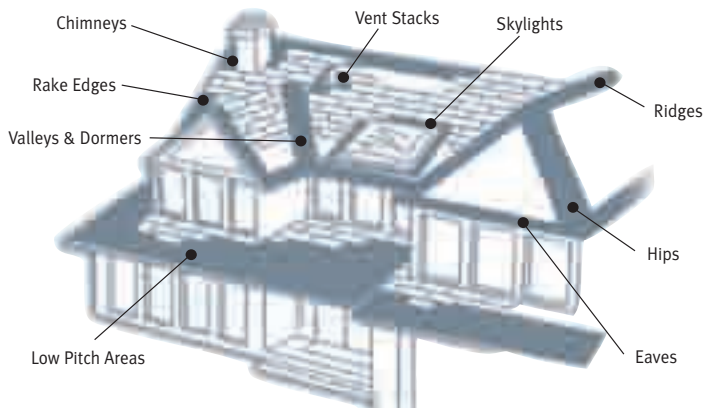

Use IKO GoldShield Premium Ice & Water Protector or ArmourGard Ice & Water Protector on these critical roof areas.

Specifications (approximate)	
GoldShield	
Length	67' (20.30 m)
Width	36" (914 mm)
Roll Contents	200 sq. ft. (18.58 m ²)
Thickness	40 mil (1 mm)
ArmourGard	
Length	65' (19.8 m)
Width	36" (914 mm)
Roll Contents	195 sq. ft. (18.1 m ²)
Thickness	67 mil (1.7 mm)

IKO Worldwide

Canadian Plants

- IKO Brampton
- IKO Calgary
- IKO Hawkesbury
- IKO Madoc
- Canroof - Toronto
- Canroof - Brampton
- IG Machine & Fibers Ltd. - Brampton
- IG Machine & Fibers Ltd. - High River
- IG Machine & Fibers Ltd. - Ashcroft
- GH International
- Bramcal Production Inc.

United States Plants

- IKO Midwest Inc.
- IKO Franklin
- IKO Pacific
- IKO Wilmington
- Fiberteq LLC
- MW/MB LLC

European Plants

- IKO Sales International NV - Belgium
- Asphaltco SA - Belgium
- ATAB NV/ASBO NV - Belgium
- IKO Insulations BV - The Netherlands
- Touwen & Co. BV - The Netherlands
- Meple SA - France
- AWA GMBH - Germany
- Ruberoid - Northern Ireland - Ireland
- Irish Roofing Felts Ltd./Ruberoid - Southern Ireland - Ireland
- Ruberoid Building Products Ltd. & Permanite Engineered Roofing Systems - UK
- Ruberoid Building Products Ltd. - UK
- Permanite Asphalt - UK
- Marley Waterproofing - UK
- Kingsnorth Bitumen - UK

European Sales Office

- IKO Dachschindeln Vertrieb GmbH - Germany
- IKO Sp. z. oo. - Poland
- IKO LLC - Russia
- IKO Sales Romania SRL - Romania
- IKO Slovakia s.r.o. - Slovakia
- IKO Magyarorszag Kft - Hungary
- IKO s.r.o. - Czech Republic
- Nebiprofa B.V. - The Netherlands
- Spectrarroof B.V. - The Netherlands

Asian Sales Office

- IKO Sales Shanghai Co. Ltd. - China

Find out more about our products now by talking to an IKO sales representative, your professional roofing contractor or contact us directly at:

United States 1-888-IKO-ROOF, Eastern Canada 1-800-361-5836, Western Canada 1-800-661-1034

or visit our web site at: www.iko.com

Member of:



Note: Shingle swatches shown are as accurate as modern printing processes allow. Shingle chips shown do not fully represent the entire color blend range of the shingles. To ensure complete satisfaction please make your final color selection from several full size shingles and view a sample of the product installed on a home.

Note: The information in this literature is subject to change without notice. IKO assumes no responsibility for errors that may appear in this literature.

